




Produkt: **UIV 4125-6**

El nummer: **1569076**

Opprettet av: **JL**

Dato: **13.03.2026**

**Innfelt stikk 125Amp**

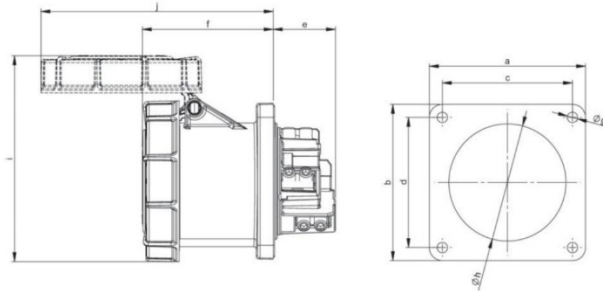

description long  
CEE-flanged socket straight (120x120) 125A 5p 6h  
IP67 POWER TWIST  
housing material: PA6  
rated current: 125A  
number of poles: 5 (3P+N+PE)  
clock-position: 6h  
rated voltage/frequency: 200/346V~ - 240/415V~ /  
50+60Hz  
contacts: brass, with lamellar spring (CuBe)  
connection technology: frame terminals with  
screws  
dimensions (flange/fixing center): 120x120 mm /  
100x100 mm  
IP protection class: IP66/IP67

GTIN (EAN)	9003399020674
country of origin	AT
customs number	85366990
net weight	0.986 kg
packaging quantity	2
minimum order quantity	2

ETIM 9.0	EC001317
IEC-amperage	125 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Flange size vertical	120 mm
Drill hole distance vertical	100 mm
Flange size horizontal	120 mm
Drill hole distance horizontal	100 mm

a	120 mm
b	120 mm
c	100 mm
d	100 mm
e	48 mm
f	101 mm
g	8 mm
h	90 mm
i	159 mm
j	179 mm
wire flexible	16-50 mm <sup>2</sup>
wire solid	16-70 mm <sup>2</sup>
contact screws	450 Ncm
dismantling length	100 mm
stripping length	24-27 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C
IK-code *)	IK10

GARO AS – Sankt Hallvarvsveg 3 – 3414 LIERSTRANDA

Telefon: 32 89 64 50

Hjemmesider: [www.garo.no](http://www.garo.no)

Mail: [garo@garo.no](mailto:garo@garo.no)