	Produkt: **Overspenningsvern GPTR Alarmmodul** El nummer: **1569395**
Opprettet av: JL **Dato: 11.08.2022**	**Overspenningsvern GPTR Alarmmodul**

NEK 400:2022 823.534.302:	*Der hvor et overspenningsvern er montert i et tilknytningsskap iht. NEK 399, skal det anordnes med utstyr i installasjonens sikringsskap eller annet egnet sted, som, når overspenningsvernet ikke lenger gir beskyttelse, initierer et akustisk og/eller visuelt signal til eier/bruker og som skal opprettholdes så lenge beskyttelsen ikke er til stede.*

- Akustisk alarm ved defekt vern.
- Avstillingsknapp for deaktivering av akustisk alarm.
  Ved strømbrudd vil akustisk signal gjenopptas.
- Rødt LED lys ved defekt vern, som vil lyse inntil defekt vern er byttet.
- Strømforsyning 230 V max 16Amp. Ingen behov for strømtrafo.

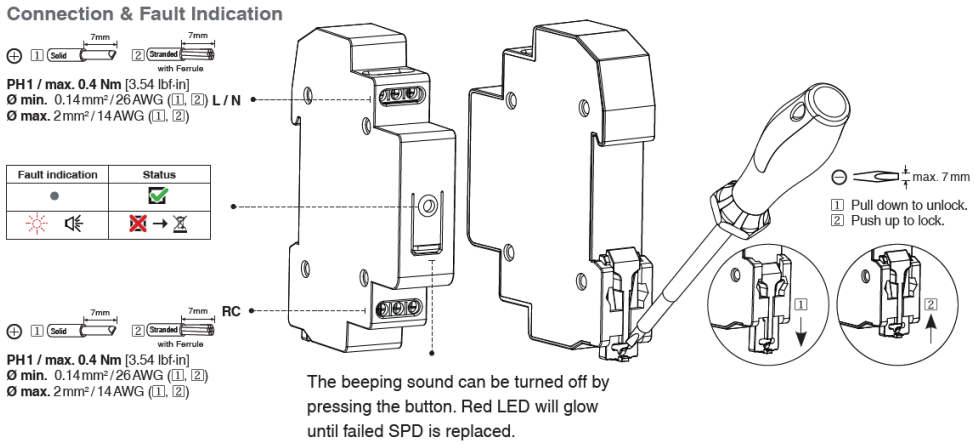

The beeping sound can be turned off by pressing the button. Red LED will glow until failed SPD is replaced.

OVERSPENNINGSVERN ALARM II		
IEC Electrical		
Rated Voltage (AC)		110V – 230V
Rated Frequency		50Hz - 60Hz
Rated Current		0mA
Rated Current (Beeping)		10mA (110V); 21mA (230V)
Overcurrent Protection (max)		16A
RC Rated Current		10mA (110V); 21mA (230V)
Mechanical & Environmental		
Overvoltage Category		III
Operating Temperature Range	T_a	-20 °C to +70 °C (-4 °F to + 158 °F)
Mounting		35mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Operating State/Display		Red LED / Audible Alarm
Sound Power Level (L_{WA})		70dB
Weight	pounds [grams]	.21 [53]

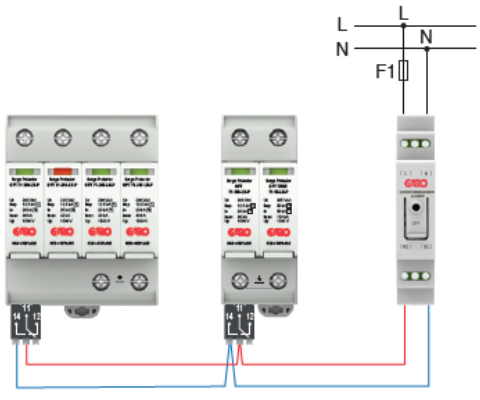

GARO AS – Sankt Hallvardsveg 3 – 3414 LIERSTRANDA

Telefon: 32 89 64 50 Hjemmesider: www.garo.no Mail: garo@garo.no

GARO AS – Sankt Hallvardsveg 3 – 3414 LIERSTRANDA

Telefon: 32 89 64 50 Hjemmesider: www.garo.no Mail: garo@garo.no